


ENWALL

BEYOND BATTERIES

TECHNICAL DATA SHEET

10KWH-48V-5KW Module

Manufactured by

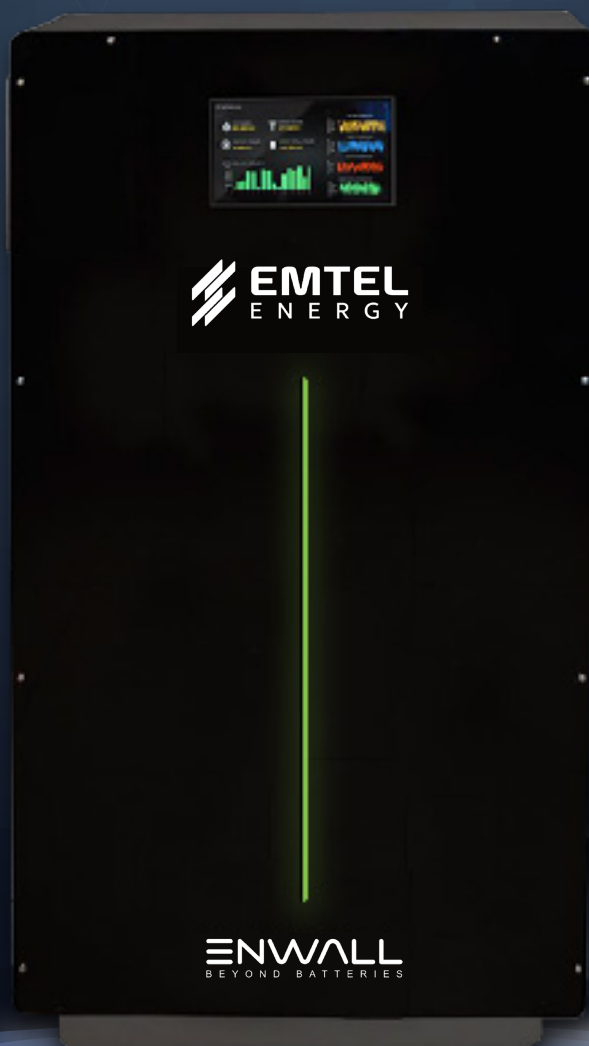


Introduction

ENWALL is Enercap's latest integrated energy storage system designed for the home and light commercial facilities. ENWALL comes with Enercap's patent ENCAP and ENSERVER cutting-edge technology. The ENWALL system can be charged by the grid, solar, wind, or genset in either standalone, standalone grid-tied, standalone off-grid, grid-tied hybrid, or off-grid hybrid mode. It can switch automatically between modes as the need arises. Using the safest energy storage technology, the system can operate in very high or low temperatures without the need for heating or cooling and has a very high AC and DC round trip efficiency. ENWALL has a direct connection to PV, the Grid, Wind, or GENSETS. The system will automatically detect outages, can power your home or electric vehicle, and will charge as soon as any of the inputs is available. ENWALL will store energy for long periods without depletion of energy through idle discharge or thermal runaway of energy through idle discharge or thermal runaway.



Enwall Mechanical Dimensions:

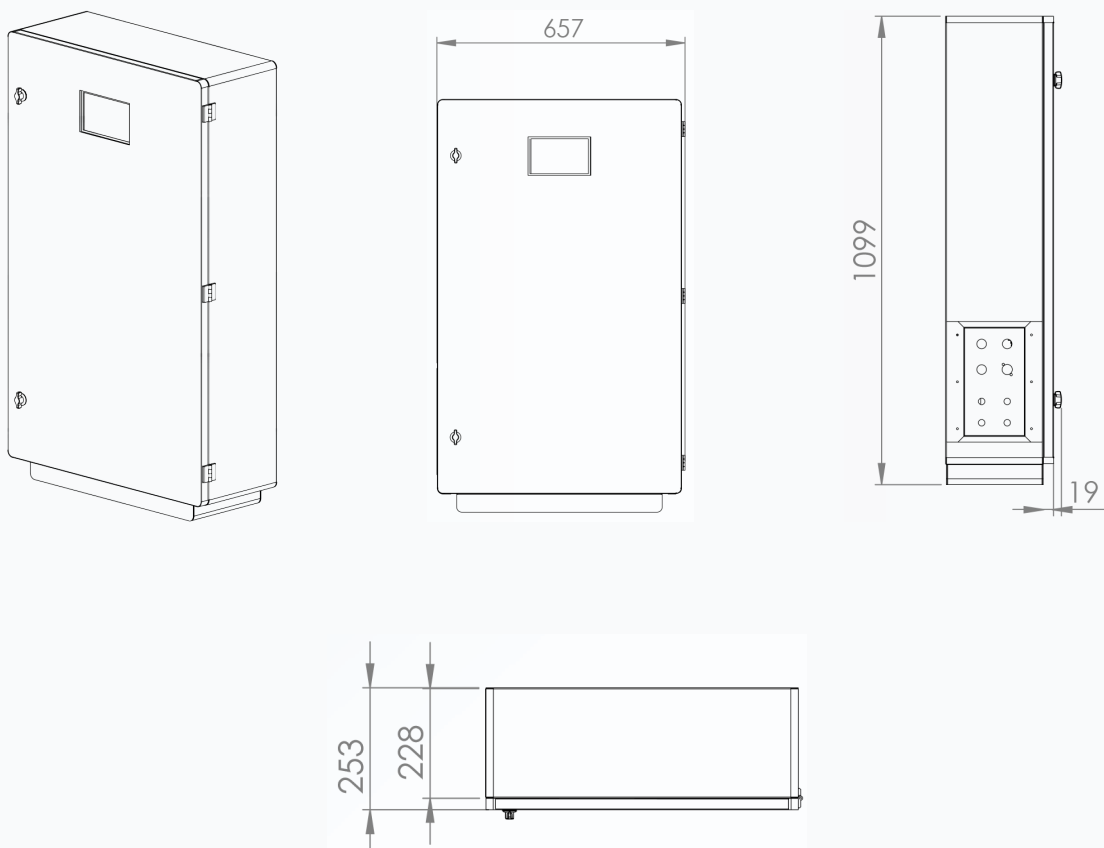

Battery Performance Specifications

DC Energy(kWh)	10
Technology	Encapsulated Cell
ESS Voltage Range	40-60Vdc
Nominal Cell Voltage	6.4~6.6Vdc / Cell (Encapsulated) 1/2 + 0.12V Envelope
Max. Charging Current(A)	208
Max. Discharging Current(A)	208
Charging Curve	3 Stages / Equalization (CC/CP/VP)
Charging Strategy	Self-adaption to BMS
DC Voltage (Nominal)	48Vdc
Internal Resistance(mΩ)	< 4

PV String Input Data

Max. DC Input Power(W)	6,500
PV Input Voltage(V)	370 (125~500)
MPPT Range(V)	150-425Vdc
Full Load DC Voltage Range(Vdc)	300-425Vdc
Start-up Voltage(V)	125Vdc
PV Input Current(A)	26Adc
Max.PV Isc(A)	34Adc
No. of MPPT Trackers	2
No. of Strings Per MPPT Tracker	2

AC Output Data

Rated AC Output and UPS Power(W)	5,000
Max. AC Output Power(VA)	5,500
Peak Power (off-grid)(W)	2 times of rated power, 10s
Rated AC Input/Output Current(A)	22.7/21.7
Max AC Input/Output Current(A)	25/23.9
Max Continuous AC Pass through (grid to load)	35Aac
Max AC Isc	75Aac

Regions		EU
Single Phase	Rated Input/Output Voltage/Range(V)	220/230
	Grid Connection Form	L+N+PE
	Rated Input/Output Grid Frequency/Range	50Hz/45Hz-55Hz
Three Phase	Rated Input/Output Voltage/Range(V)	230/400
	Grid Connection Form	3L+N+PE
	Rated Input/Output Grid Frequency/Range	50Hz/45Hz-55Hz
Split Phase	Rated Input/Output Voltage/Range(V)	230/400
	Grid Connection Form	2L+N+PE
	Rated Input/Output Grid Frequency/Range	50Hz/45Hz-55Hz
Power Factor Adjustment Range	0.8 leading to 0.8 lagging	
Total Current Harmonic Distortion THDi	<3% (of nominal power)	
DC current injection	<0.5%LN	
Efficiency		
Max. Efficiency	97.60%	
MPPT Efficiency	>99%	
Smart Features		
OLED Display	Monitor & Configure Module	
Communication	WIFI / CANBUS / Bluetooth	
Alarm	Buzzer alarm in the event of Over/under-Voltage, Over-Current, Over Temperature	
EN-Connect Software		
Module Monitoring	Total Voltage, Individual Cell Voltages, Current, Temperatures, Instantaneous Power, SOC and Energy Consumed	
Environmental Specifications		
Cell Operating Temperature	-30°C~+70°C	
Operating Humidity	Non-Condensing	
Warehousing	Can be stored at any SOC without affecting cycle life	

Mechanical Specifications

Dimensions (W x H x D) mm	657 x 1099 x 253
Weight (Kg)	150
Module Casing Material	GI Powdered
Installation Style	Wall Mounted
Permissible Altitude	2000m
Ingress Protection(IP) Rating	IP 65

Equipment Protection

Battery Short Circuit Protection	Electronic Switching, Terminal Cut-off
Battery Over/Under Voltage	Electronic Switching, Terminal Cut-off
Battery Over Current	Electronic Switching, Terminal Cut-off
Battery Over Temperature	Electronic Switching, Terminal Cut-off
Integrated	DC Polarity Reverse Connection Protection, AC Output Over Current Protection AC Output Over Voltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Over voltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level
Surge Protection Level	TYPE II(DC),TYPE II(AC)

General Data

Noise	<30 dB(A)
Inverter Topology	Non-Isolated
Over Voltage Category	OVC II(DC), OVC III(AC)
Type Of Cooling	Intelligent Air cooling
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21,EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25,G99, VDE-AR-N 4105
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2

5KW-10KWH

EU Diagram
Single Phase, Split Phase & Three Phase

